

# TREK-570

## Compact In-Vehicle Computing Box for Fleet Management



### Features

- Equipped with DeviceOn/iService software for remote device management
- Can be paired with TREK-303/306 in-vehicle smart display via a single-cable connection
- Supports real-time rear view monitoring
- Dual independent displays/audio outputs for in-vehicle infotainment and digital signage applications
- Vehicle diagnostics interface with support for configurable CAN (J1939, OBD-II/ISO 15765) and J1708 (J1587) protocols
- Built-in GNSS, WLAN, Bluetooth, and WWAN (with a dual SIM card slot) modules
- Wide operating temperature range (-30 ~ 70 °C/-22 ~ 158 °F)
- MIL-STD-810G and 5M3 certified for shock and vibration tolerance

### DeviceOn/iService

### Introduction

TREK-570 is a compact and economical in-vehicle computing box powered by an Intel® Atom™ E3826 SOC and can be paired with TREK-303/306 in-vehicle smart displays via a single-cable connection. Aimed at fleet management applications, TREK-570's wide operating temperature and MIL-STD-810G and 5M3 certification for shock vibration resistance enable it to withstand harsh environments. The inclusion of an intelligent vehicle power management (VPM 2.0) chip protects against transient voltage (ISO 7637-2/SAE J1455/SAE J1113) and enables programmable functions (ignition on/off, delay on/off, and low battery monitoring). TREK-570 also features various I/O for integrating CAN bus devices and peripherals, such as a tire pressure monitoring system. The dual CAN bus ports support diverse protocols (J1939, OBD-II/ISO 15765) to facilitate vehicle diagnostics and driver behavior management. Built-in wireless communication technologies (WLAN, WWAN, Bluetooth) enable vehicle tracking and real-time data transmissions to a centralized control center. TREK-570 also supports dual independent displays/audio outputs for in-vehicle infotainment and digital signage applications.

Moreover, TREK-570 is equipped with Advantech's DeviceOn/iService software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

### Specifications

|                |   |  |  |
|----------------|---|--|--|
| Core           | Processor   | Intel® Atom™ E3826, dual-core, 1.46 GHz  |  |
|                | Memory  | 1 x 4 GB DDR3L SODIMM 1600 MHz, non-ECC  |  |
|                | Graphics  | Integrated 2D/3D graphics engine   |  |
|                | Operating System  | Win10 IoT LTSP, Linux Ubuntu 16.04   |  |
| Storage        | mSATA   | 1 x 32 GB UMLC, SQFlash mSATA, with support system bootup                                    |  |
| Display        | Smart Display Ports¹  | 1 x 12V/2A power output for TREK-30x   |  |
|                |   | 1 x 18-bit LVDS with 800 x 480/1024 x 768 resolution and automatic detection                 |  |
|                |   | 1 x Line-Out² (for TREK-30x speakers)  |  |
|                |   | 2 x UART (TX/RX, TX/RX/RTS) (for touchscreen, hot keys, and brightness/light sensor control) |  |
|                |   | 1 x USB 2.0 Type A   |  |
|                |   | 1 x Power button   |  |
|                |   | 1 x Reset button   |  |
|                |   | VGA  | 1 x DB15 (up to 2560 x 1600 resolution)  |
|                | HDMI³   | 1 x HDMI (up to 2560 x 1600 resolution)  |  |
| I/O            | Vehicle I/O   | 2 x CAN bus with raw CAN, J1939, and OBD-II/ISO 15765 support (configurable via firmware)    |  |
|                |   | 1 x J1708 with J1587 support   |  |
|                |   | 1 x 4-wire RS-485 with auto flow control   |  |
|                | Generic I/O   | 2 x 4-wire RS-232  |  |
|                |   | 4 x Isolated DI (dry contact)  |  |
|                |   | 4 x Isolated DO (open collector output, driven by relay)                                     |  |
|                | Standard I/O  | 1 x CVBS-In (for real-time rear view monitoring)   |  |
|                |   | 1 x Line-Out²  |  |
|                |   | 1 x Mic-In   |  |
| LED Indicators | 5 x LEDs: 1 x Power (red), 1 x Storage (yellow), 1 x WLAN (green), 1 x WWAN (green), 1 x GPS (yellow) |  |  |
|                | Via TREK-30x in-vehicle smart display; system is powered on by vehicle ignition as a default          |  |  |
|                | Reset Button  | 1 x Reset button (rear side)   |  |
|                | RF  | WLAN + Bluetooth   | IEEE 802.11a/b/g/n + Bluetooth V4.0 combo module via full mini PCIe slot (optional high-power WLAN/WLAN roaming available upon request)    |
|                |   | WWAN   | 4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev. a1, 1xRTT) Sierra AirPrime WP76XX via full mini PCIe slot (default: WP7610 for US/WP7607 for EU) |
| GNSS           |   | MAC-M8Q/W GPS/GLONASS/BeiDou 3 in 1 module   |  |
| Antenna        | 5 x SMA-type antenna holes for GPS, Wi-Fi+Bluetooth MIMO, WWAN/LTE MIMO⁴                              |  |  |

## Specifications Cont.

|   |   |  |
|---|---|--|
| Power   | Input Voltage                                   | Compatible with 12/24 V vehicle power (6 ~ 32 VDC input; ISO 7637-2 and SAE J1113 compliant)   |
|   | Intelligent Vehicle Power Management (iVPM 2.0) | System power on/off/hibernate management (programmable ignition on/off delay)<br>Supports wake-up events: Wake on Alarm (RTC), Wake by Call/SMS, Wake by G-sensor, and Wake by DI (DI0 & DI1)<br>System power protection (low voltage protection for vehicle battery)<br>System monitoring and diagnostics |
| Mechanical                                    | Dimensions (W x H x D)                          | Standalone unit: 230 x 72 x 118 mm (9.05 x 2.83 x 4.64 in)<br>With IP54-rated I/O cover: 230 x 72 x 198 mm (9.05 x 2.83 x 7.79 in)   |
|   | Weight  | Standalone unit: 1.45 kg (3.19 lb)<br>With IP54-rated I/O cover: 1.95 kg (4.29 lb)   |
| Environment                                   | IP Rating                                       | IP30 (optional IP54-rated I/O cover available upon request)  |
|   | Vibration/Shock                                 | MIL-STD-810G, EN60721-3(5M3)   |
|   | EMC   | CE, FCC, CCC   |
|   | Safety  | UL/cUL, CB   |
|   | Vehicle Regulations                             | E-Mark (E13), SAE J1455 class C, ISO 7637-2, SAE J1113   |
|   | RF Regulations                                  | CE (R&TTE), FCC ID, PTCRB  |
|   | Operating Temperature                           | -30 ~ 70 °C (-22 ~ 158 °F)   |
| DeviceOn/iService<br>Remote Device Management | Storage Temperature                             | -40° C ~ 80° C (-40 ~ 176 °F)  |
|   | Operating System                                | Windows 10   |
|   | Common Controls (Reboot, Shutdown)              | ✓  |
|   | Remote desktop                                  | ✓ (VNC)  |
|   | Device-Specific Controls (Audio, Backlight)     | ✓*   |
|   | Connection Status                               | ✓  |
|   | Hardware Status                                 | ✓*   |
|   | Hard Disk Status                                | ✓*   |
|   | Batch Operation Support                         | ✓  |
|   | OTA Storage Management                          | FTP  |
|   | OTA Software Updates                            | ✓  |
|   | Software Watchlist                              | ✓  |
|   | Software Start/Stop                             | ✓*   |
|   | Peripherals Watchlist                           | ✓*   |
| *Dependant on device model                    |   |  |

<sup>1</sup> When paired with TREK-303/306 via a single-cable connection

<sup>2</sup> Supports dual independent audio streams. The Line-Out interfaces of the smart display ports and generic I/O are driven by different audio codecs.


<sup>3</sup> BYT-I can support dual independent displays (smart display + VGA, smart display + HDMI, or VGA + HDMI).

<sup>4</sup> The box-side connector is RP-SMA, female (external female thread with male internal pin)


Note: DeviceOn/iService software must be downloaded from the Advantech website at <https://www.advantech.com/search?q=DeviceOn%2FiService&st=support&sst=Utility>

## Dimensions

Unit: mm

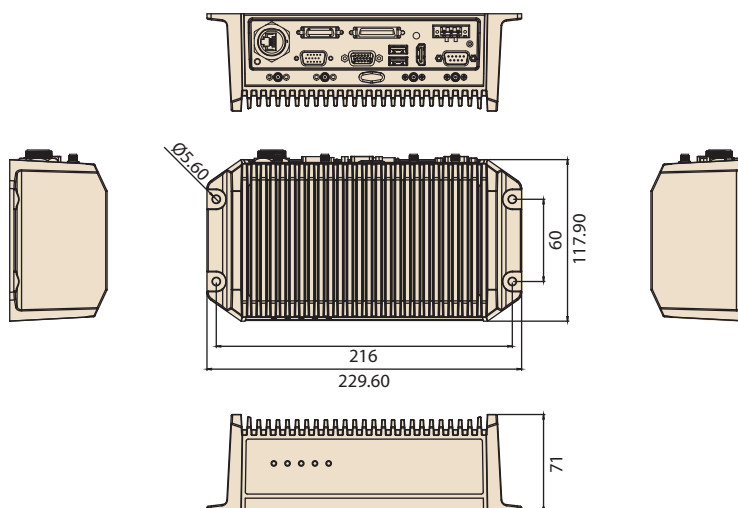

## System I/O

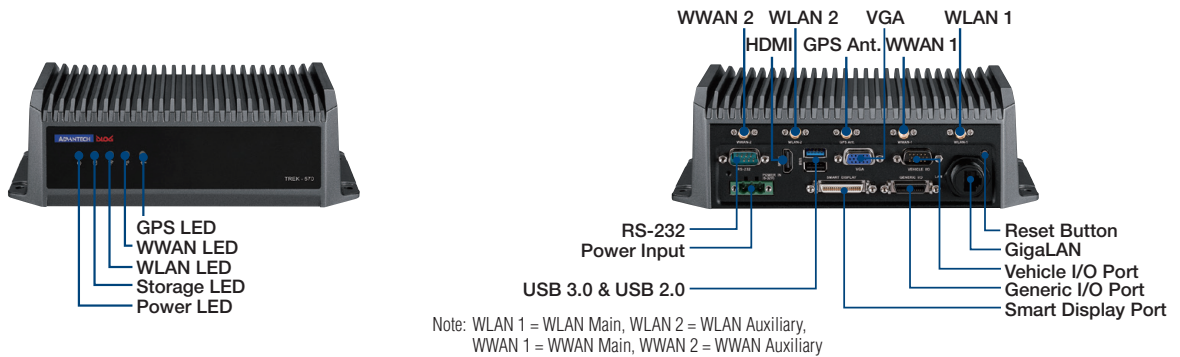

## Ordering Information

| Part Number      | Description                                     |
|------------------|---|
| TREK-570-00A1E   | TREK-570 FL intel BYT E3826 barebone unit       |
| TREK-570-LWBXA1E | TREK-570 FL W/LTE (EU)/GPS/WLAN/BT/W10 IoT LTSB |
| TREK-570-LWBXB1E | TREK-570 FL W/LTE (US)/GPS/WLAN/BT/W10 IoT LTSB |

Note: Linux OS image is available upon request

## Packing List

| Part Number   | Description                         |
|---------------|-------------------------------------|
| 1700019031    | Power cable, 2 m                    |
| 1700023050-11 | Generic I/O cable                   |
| 1700023051-01 | Vehicle I/O cable                   |
| 1654011716-01 | Waterproof RJ45 locking kit         |
| 1750007724-01 | 3-in-1 (LTE/GPS/Wi-Fi) antenna, 3 m |
| 1750007723-01 | Wi-Fi antenna, 3 m                  |

## Optional Accessories

| Part Number      | Description  |
|------------------|--|
| TREK-303R-HA0E   | TREK-303 7" WVGA in-vehicle smart display                                    |
| TREK-306D-HA0E   | TREK-306DH 10.4" XVGA in-vehicle smart display                               |
| 1700020007       | M cable SCSI-36P(M)/SCSI-36P(M), 2 m, for TREK-303                           |
| 1700020008       | M cable SCSI-36P(M)/SCSI-36P(M), 5 m, for TREK-303                           |
| 1700019464       | A cable 1*3P-5.08/DC jack+SW, 155 mm, for in-house testing                   |
| 96PSA-A65W19V1-1 | Adaptor 100-240 VAC, 60W, 12 V, 5A, w/o PFC FSP060-DBA, for in-house testing |

# DeviceOn/iService

## Unified Remote Device Management Software



### Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

### Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

### Total Management



#### Devices & Hardware

- Windows, Linux, Android
- Hardware, storage, battery



#### Software & Peripherals

- Software monitoring & access
- Screens, USB devices, printers



#### Open for Expansion

- Peripheral integration
- Open APIs for integration

### Remote Access



#### Real-Time Monitoring

- Connection/hardware status
- Software/peripheral status
- Failure notifications



#### Remote Controls

- Power controls
- Audio, backlight controls
- Software controls



#### Troubleshooting

- Screenshots
- Remote desktop support

### Operational Efficiency



#### OTA updates

- System/software updates
- File repository management
- App store



#### Batch Controls

- 1-to-many batch reboot, etc.
- Time-saving tasks



#### Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

### System Architecture

