

# Low Voltage DC Power Cord

Locking Female Barrel Connector, Stripped/Tinned Leads  
Model PSPT-LB

**B+B SMARTWORX**

Powered by

**ADVANTECH**

[www.advantech-bb.com](http://www.advantech-bb.com)



## FEATURES

- Standard DC Power Plug
- Molded Strain Relief
- 2.5 x 5.5mm Locking Barrel Connector
- Stripped and Tinned Leads
- 6.5mm Locking Thumb Screw
- 1m (39.4in) Length

Model PSPT-LB is a power cable with a 2.5x5.5mm threaded locking barrel plug on one end and stripped and tinned leads on the other - for use with industrial power supplies.

## ORDERING INFORMATION


MODEL NUMBER	DESCRIPTION
PSPT-LB	Low-voltage DC Power Cord, Barrel, Stripped/Tinned Leads, 1 m

## SPECIFICATIONS

<b>Cable Type/Size</b>	SPT-1 cord, 18AWG x 2, stranded wire, 300V, 75 °C rated, PVC jacket	
<b>Cable Jacket Color</b>	Black	
<b>Polarity</b>	Stripe conductor connected to inner of barrel(+)	
<b>Overall Length</b>	1000 +100, -0 mm	
<b>Cable Outer Diameter</b>	2.7 x 5.4 +/- 0.1 mm	
<b>End "A" Termination (P1)</b>	Locking female barrel, 5.5 x 2.5mm, with 6.5mm locking thumb screw	
<b>End "B" Termination</b>	Lead wires, stripped and tinned	
<b>Strain Relief</b>	SR2 type for GT-21097 enclosure	
<b>Compliance</b>	RoHS	
<b>COLOR</b>	<b>SPLIT (MM)</b>	<b>STRIP &amp; TIN (MM)</b>
Ribbed	74	9
Smooth	74	9

## MECHANICAL DRAWING

Units = mm

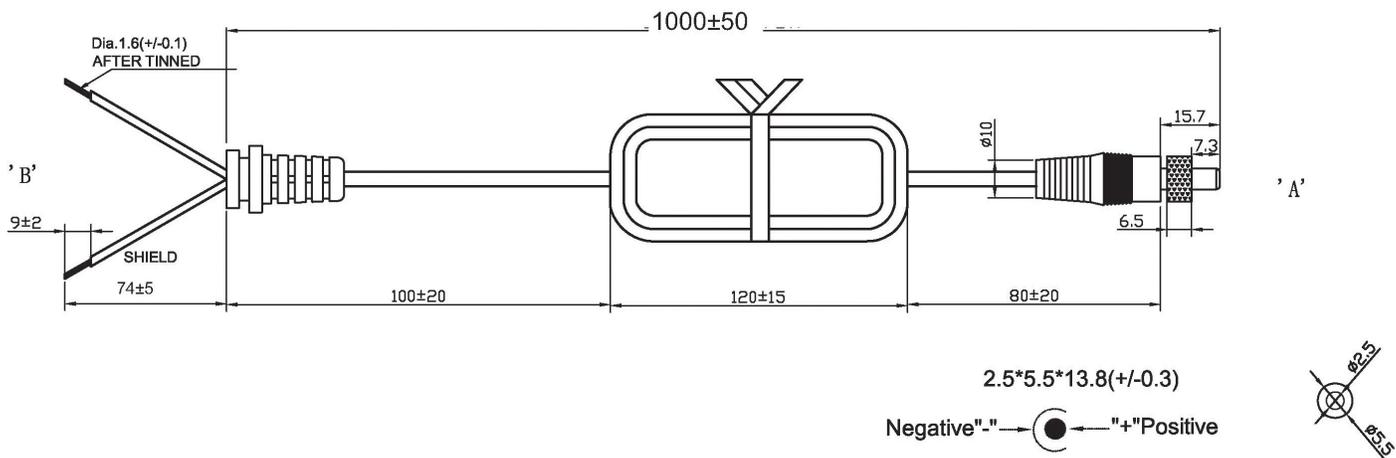

All product specifications are subject to change without notice.

PSPT-LB\_0218ds